



Datasheet ValkAce - Smartline roof hook


Technical specifications

- Mounting system for pitched roofs with tiles by screw fastening to impregnated construction timber attached to the roof battens or rafters.
- Roof hooks to be used for horizontal and vertical profile mounting (portrait / landscape)
- Roof hook manufactured in stainless steel.
- Roof hook coupling manufactured in steel with zinc magnesium coating.


Key benefits ValkAce - Smartline roof hook

- Very suitable for UNIDEK roofs.
- Possibility of height adjustment of profiles up to 32.5 mm.
- Easy to use with ValkAce profiles and ValkAce panel clamps.
- Roof hook easy to fit using plastic shims (article 739003).

Article information

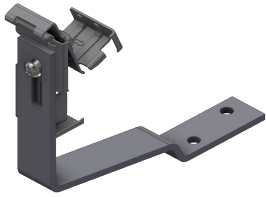Material no.	747502
Description	ValkAce - Smartline roof hook
GTIN code	08719632527244
Image	
Weight (kg)	0,488
Pcs. per packaging	35


Dimensions (mm)

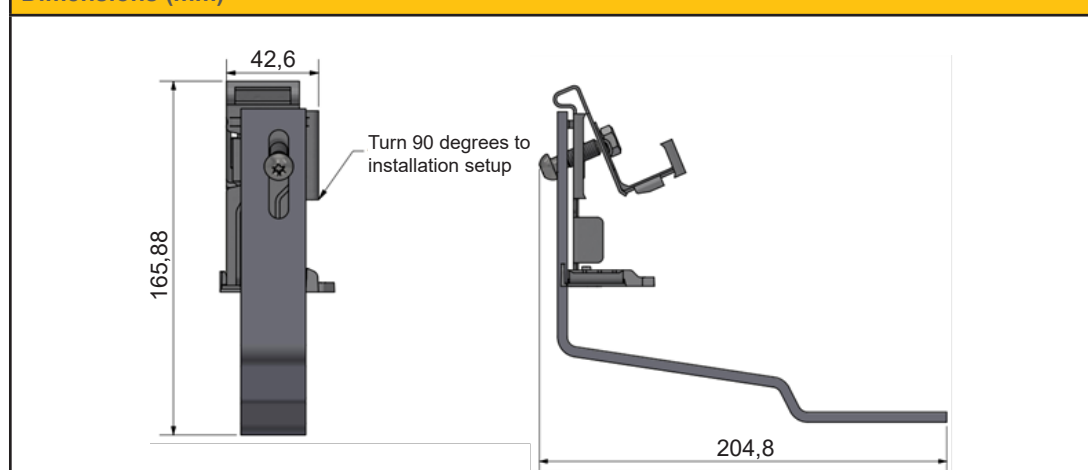



Datasheet ValkAce - Smartline roof hook

Profile horizontal (portrait) and vertical (landscape)

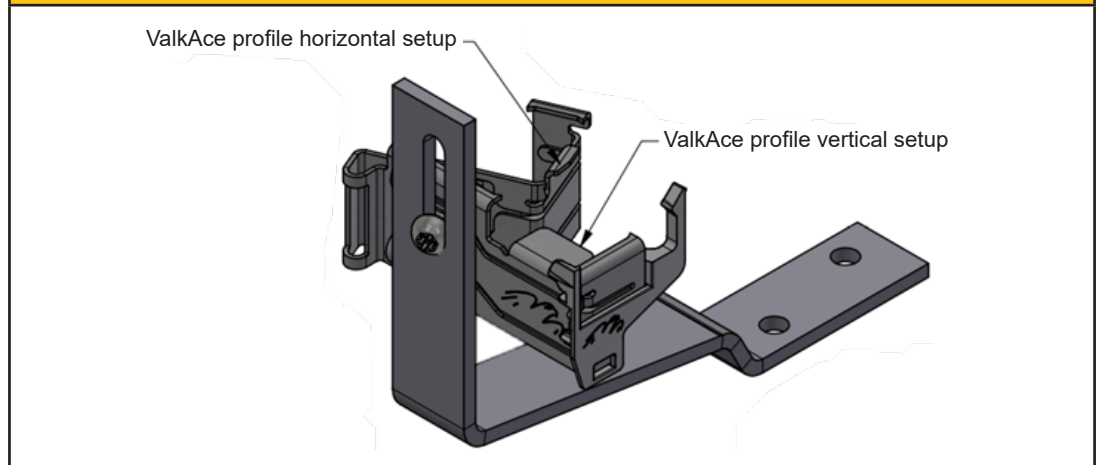

Technical specifications ValkAce

- Standard profile lengths ideal for panels 1134 mm wide.
- Suitable for 25 - 30 - 35 - 40 mm panel height.
- Space between panels 13 mm.

Key benefits ValkAce

- Easy clip-on panel clamps and slide-in coupling.
- Only one tool required (T30).
- Super-fast installation and easy height adjustment.
- Automatic electrical connection of metal parts and panels.
- Clip-on cable management and earth terminal.
- Very limited number of components for easy logistics and assembly.

Calculations

Projects using the ValkAce - Smartline roof hook can be calculated easily and according to regionally applicable standards using the [ValkPVplanner](#).